
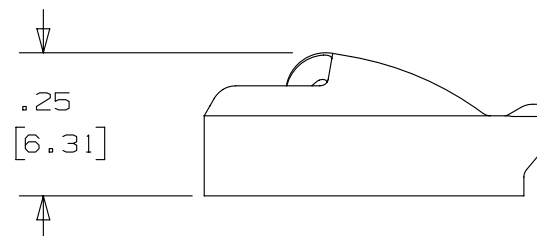
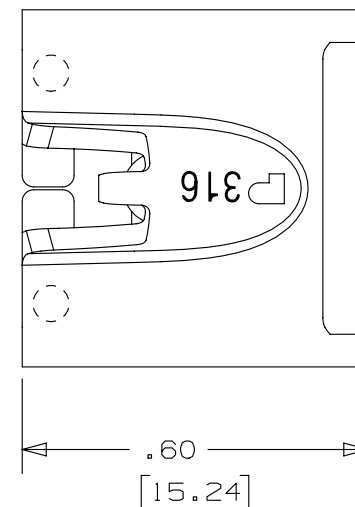



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. TO BE USED WITH PANDUIT METAL BANDING MBCEH-QR316
2. INSTALLATION TOOLS: RT2HT, ST2MT, PBTMT, RT2HTN
3. BRACKETS [] DENOTES DIMENSIONS IN MILLIMETERS
4. MINIMUM LOOP TENSILE STRENGTH: 300 LBS (1335 newtons)
5. TOLERANCES: $.X = \pm .030$ [$.762$]
 $.XX = \pm .020$ [$.508$]
 $.XXX = \pm .010$ [$.254$]
 ANGLES = $\pm 2^\circ$
6. MATERIAL: 316 STAINLESS STEEL

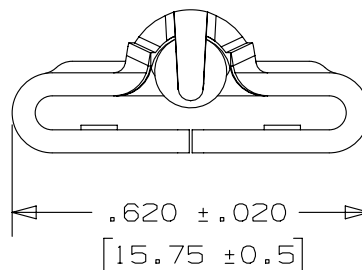

02A	4/13	JAMB	MIM	RGR0	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01047
01A	7/11	JAMB	MIM	---	REMOVED INSTALLATION TOOL ST3MT. ADDED INSTALLATION TOOL ST2MT, PBTMT, RT2HTN	-----
00A	10/08	JAMB	SKB	---	ORIG CAD FILE SPEC WAS S41197_00. NOTE 2: APPLICATION TOOL RT1HT REPLACED BY RT2HT	-----
00	9/05	JAMB	EJD	---	DRAWING RELEASED	SS00053
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE				METAL LOCKING TIE HEAD – EXTRA HEAVY DUTY – FOR FULLY COATED BANDING PART NUMBER MTHCEH-C316	
ITEM REVISION NAME				CUSTOMER DRAWING	
N41197BS/02					
DATASET FILE NAME					
N41197BS_DC/02A				MATERIAL:	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				SEE NOTES	
.x ± .1 [2.54] .xx ± .01 [.25] .xxx ± .005 [.127] ANGLES ± 5 °				DRAWING NUMBER:	
				N41197BS_DC	
THIRD ANGLE PROJECTION					
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	
JAMB	9/16/05	EJD	3:1	A	