




**№ 97 DRAW CATCH (WITH SECURITY FEATURES) - MOUNTING SPECIFICATIONS**  
**ASSEMBLIES WITH SNAP-LOCK -**


DATE	DRAWN	CWKB	SCALE	DRAWING NUMBER
12-22-83	TCC		NTS	J-97-50-21-4

LEVER STYLE	SPRING RATING	SPRING LENGTH	PART NUMBER	L	S
ACTUATING TAB UP	LIGHT DUTY	SHORT	97-50-310-2X	29.4 / 1 1/2	31.8 / 1 1/4
	HEAVY DUTY	MEDIUM	97-50-370-2X	42.1 / 1 3/4	44.4 / 1 3/4
		LONG	97-50-350-2X	54.8 / 2 1/8	57.1 / 2 1/4
ACTUATING TAB DOWN	HEAVY DUTY	SHORT	97-50-350-21	28.4 / 1 1/8	31.8 / 1 1/4
		MEDIUM	97-50-360-21	42.1 / 1 3/4	44.4 / 1 3/4
	LONG	97-50-370-21	54.8 / 2 1/8	57.1 / 2 1/4	
	LIGHT DUTY	SHORT	97-50-410-2X	29.4 / 1 1/2	31.8 / 1 1/4
		MEDIUM	97-50-470-2X	42.1 / 1 3/4	44.4 / 1 3/4
		LONG	97-50-430-2X	54.8 / 2 1/8	57.1 / 2 1/4
HEAVY DUTY	SHORT	97-50-450-21	29.4 / 1 1/2	31.8 / 1 1/4	
	LONG	97-50-460-21	42.1 / 1 3/4	44.4 / 1 3/4	
			97-50-470-21	54.8 / 2 1/8	57.1 / 2 1/4

PART NUMBER SUFFIX INDICATES MATERIAL & FINISH  
 21- LEVER BASE SPRING - STEEL, ZINC PLATE BRIGHT, PIN & RIVET: SS, NATURAL  
 SNAP LOCK-STEEL, ZINC PLATE PLUS BLACK ORGANIC COATING.  
 22- LEVER, BASE AND SPRING- STAINLESS STEEL, PASSIVATE.  
 PIN AND RIVET- STAINLESS STEEL, NATURAL, SNAP LOCK- STAINLESS STEEL, BLACK ORGANIC COATING

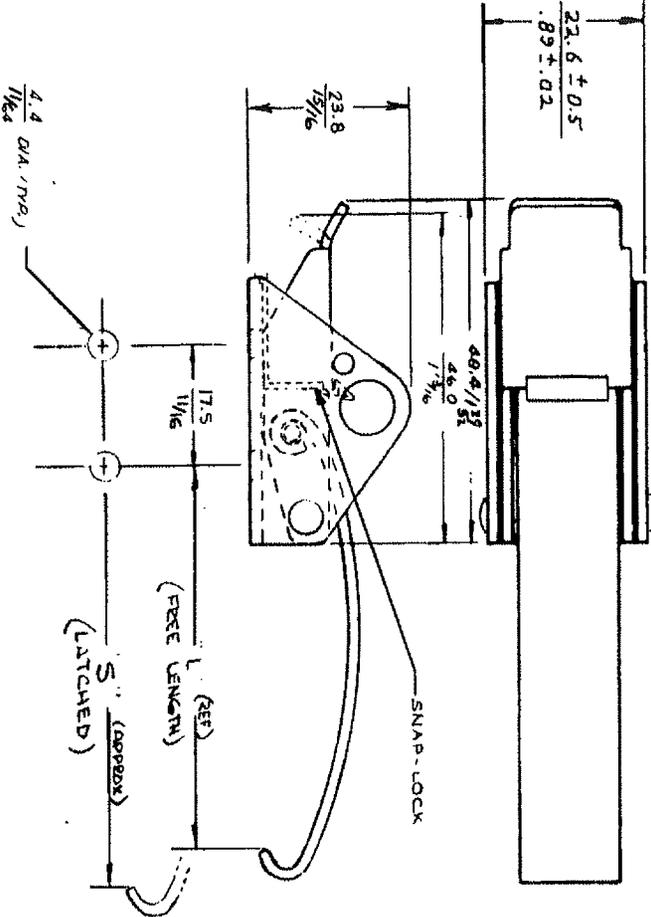

NOTE ~ SNAP-LOCK SHIPPED UNASSEMBLED

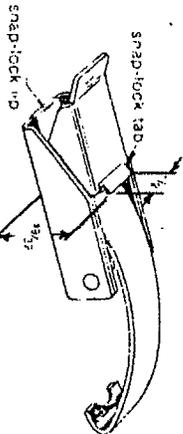

**To Install**  
 While installing latch base, position it, turned down tip of snap-lock against rear edge of base to align mounting holes. Insert mounting screw or rivet through both parts.  
 To open, push snap-lock tab forward and lift latch over.  
 To close, just push lever back down, snap-lock will spring to locked position.

NOTE ~ LATCH SHOWN IS A TYPICAL ONE WITHOUT SECURITY FEATURES.

REV E / 02JUL2015 / P2015-1305 / CMS/NJF

REV. A	4-24-84	DEM	DRN 97-69
REV. B	11-4-86	YSS	PRN: 97-109
REV. C	5-22-90	RIP	PRN 97-150
REV. D	12 JAN 93	JC	PRN 5-1-83

PROPRIETARY ITEM- EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.

DRAWING NUMBER  
**J-97-50-21-4**