
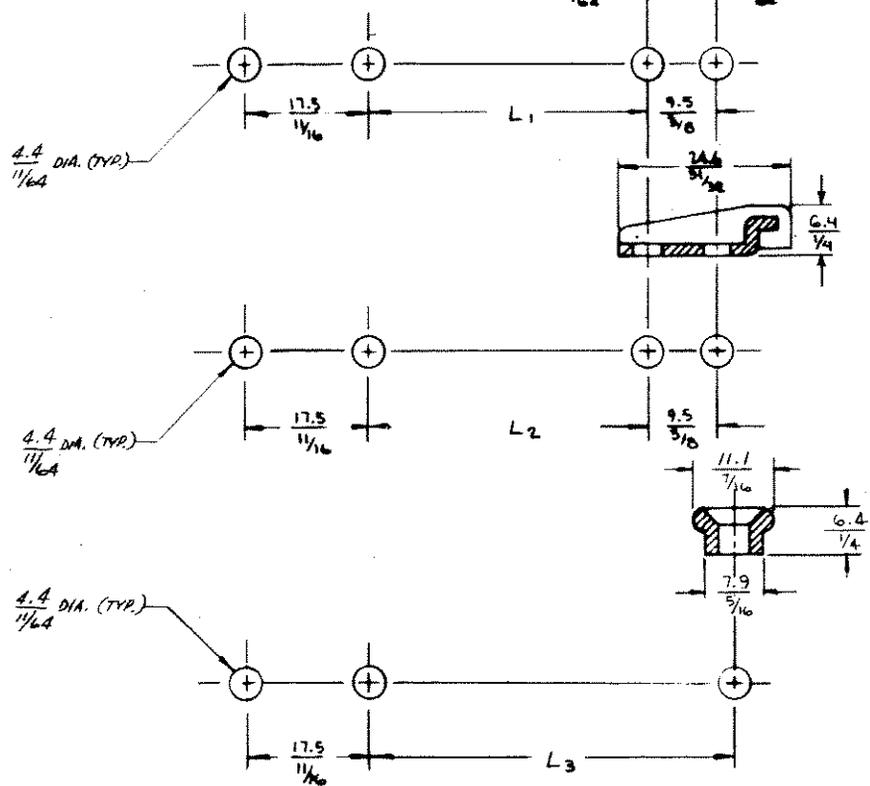



LEVER STYLE	SPRING RATING	SPRING LENGTH	KEEPER WITH TWO MOUNTING HOLES	L ₁	KEEPER WITH ONE LUG AND ONE HOLE	L ₂	BUTTON TYPE KEEPER	L ₃
ACTUATING TAB UP	LIGHT DUTY	SHORT	97-50-111-25	25.3	97-50-112-25	25.3	97-50-113-25	25.3
		MEDIUM	97-50-121-1	25.3	97-50-121-1	25.3	97-50-123-1	25.3
		LONG	97-50-131-1	25.3	97-50-132-1	25.3	97-50-133-1	25.3
	HEAVY DUTY	SHORT	97-50-151-1	25.3	97-50-152-1	25.3	97-50-153-1	25.3
		MEDIUM	97-50-161-1	25.3	97-50-162-1	25.3	97-50-163-1	25.3
		LONG	97-50-171-1	25.3	97-50-172-1	25.3	97-50-173-1	25.3
ACTUATING TAB DOWN	LIGHT DUTY	SHORT	97-50-211-1	25.3	97-50-212-1	25.3	97-50-213-1	25.3
		MEDIUM	97-50-221-1	25.3	97-50-222-1	25.3	97-50-223-1	25.3
		LONG	97-50-231-1	25.3	97-50-232-1	25.3	97-50-233-1	25.3
	HEAVY DUTY	SHORT	97-50-251-1	25.3	97-50-252-1	25.3	97-50-253-1	25.3
		MEDIUM	97-50-261-1	25.3	97-50-262-1	25.3	97-50-263-1	25.3
		LONG	97-50-271-25	25.3	97-50-272-25	25.3	97-50-273-25	25.3

PART NUMBER SUFFIX - INDICATES MATERIAL & FINISH

-25~ LEVER, BASE, SPRING AND KEEPER - STEEL, BLACK POWDER COATED.
SNAP LOCK - STEEL, ZINC PLATE PLUS BLACK POWDER COATING.
PIN AND RIVET - STAINLESS, BLACK POWDER COATED.

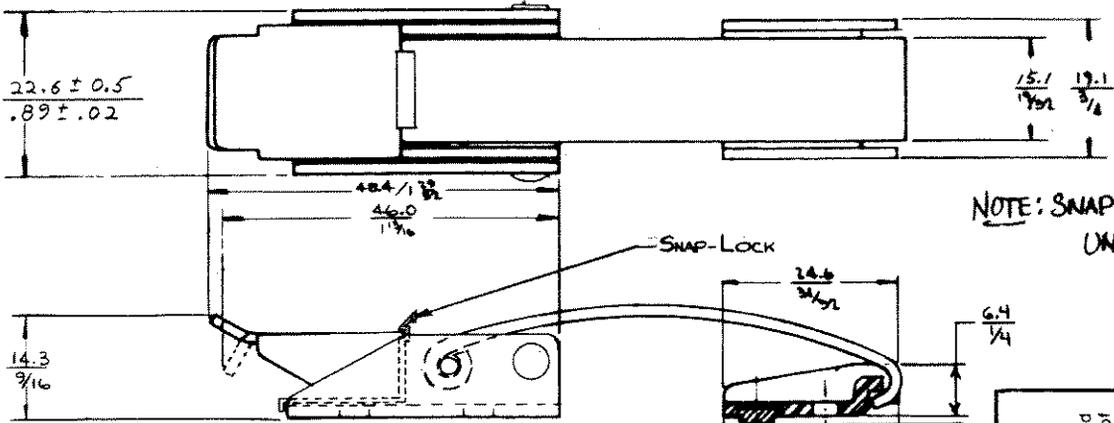

To Install
While installing latch base, position turned down lip of snap-lock against rear edge of base to align mounting holes. Insert mounting screw or rivet through both parts.

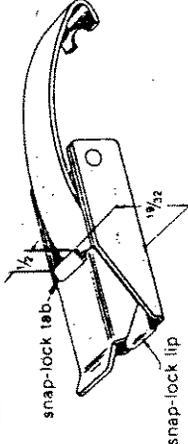

To open, push snap-lock tab forward and lift latch lever.
To close, just push lever back down, snap-lock will spring to locked position.

mm
INCH

PROPRIETARY ITEM - EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING,
 INFORMATION DISCLOSED HEREIN IS CONFIDENTIAL AND ALL RIGHTS, PATENT
 AND OTHERWISE ARE RESERVED.