

**southco®**

PROPRIETARY ITEM - EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY SOUTHCO, INC.

No. E5 QUAD LATCH  
L-HANDLE KNOB STYLE


DATE	DRAWN	CHKD	SCALE	DRAWING NUMBER
25NOV2008	MJS	LAH	1:1	TD-E5-9-7-J

REV	DATE	DRAWN/CHKD	DESCRIPTION
A	29JAN2009	JSS	PRN:P2009-0106

THIRD ANGLE PROJECTION  A4 PAPER SIZE

**SOUTHCO PERFORMANCE GUIDELINES**

THE PERFORMANCE GUIDELINES SHOWN ON THIS PAGE ARE SUPPLIED AS A GENERAL GUIDE ONLY, AS CONDITIONS VARY WITH EACH APPLICATION AND METHOD OF INSTALLATION. STRENGTH DATA GIVEN IS FOR FAILURE OF THE PRODUCT OR FOR SUFFICIENT DEFORMATION TO MAKE PRODUCT INOPERABLE. NO SAFETY FACTOR HAS BEEN APPLIED IT IS RECOMMENDED THAT THE USER REQUEST A PRODUCT SAMPLE FOR TESTING TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE PURPOSE INTENDED AND USER'S PARTICULAR APPLICATION.

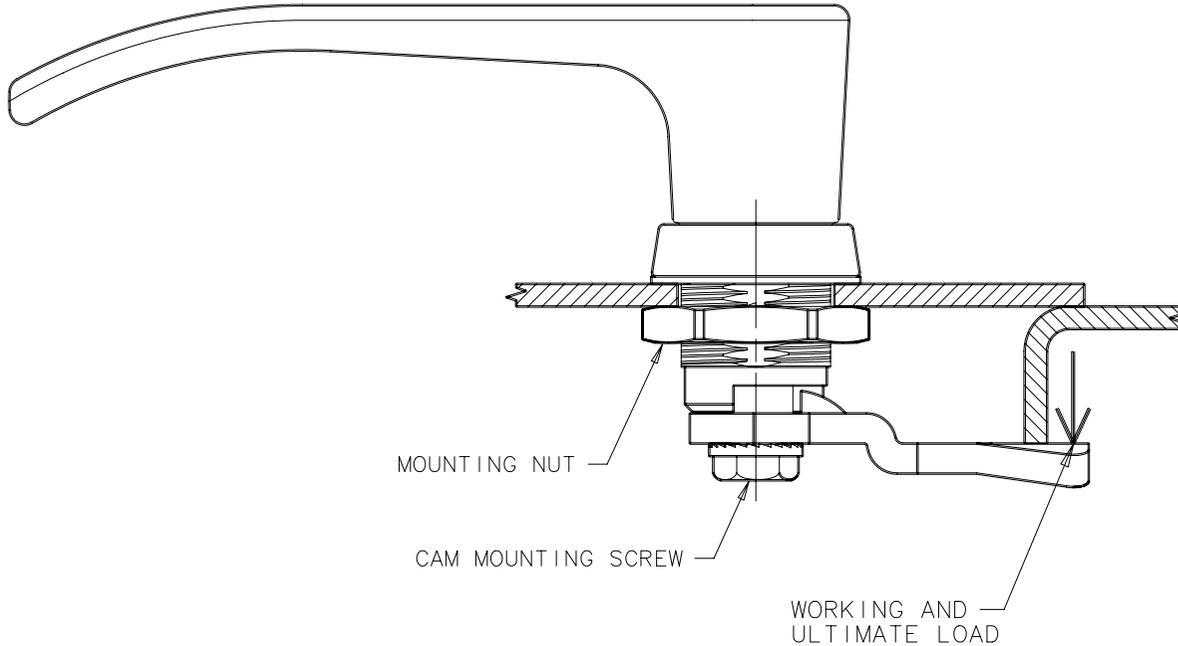

TEST DESCRIPTION	E5-9-7XX-UU1-XX
① MAXIMUM RECOMMENDED STATIC WORKING LOAD	330 N
② AVERAGE ULTIMATE LOAD	450 N
③ MAXIMUM RECOMMENDED MOUNTING NUT TIGHTENING TORQUE	10 N•m
④ MAXIMUM RECOMMENDED CAM SCREW TIGHTENING TORQUE	4 N•m
CYCLE LIFE	15,000 AT 67 N

- ① STATIC WORKING LOAD IS THE MAXIMUM FORCE THAT THE PRODUCT WILL WITHSTAND WITHOUT AFFECTING THE OPERATION OR APPEARANCE OF THE PRODUCT.
- ② AVERAGE ULTIMATE LOAD CAUSES FAILURE OF THE PRODUCT OR SUFFICIENT DEFORMATION TO MAKE THE PRODUCT INOPERABLE.
- ③ FAILURE OCCURED WHEN THE THREADS ON THE HOUSING STRIPPED.
- ④ FAILURE OCCURED WHEN THE PHILLIPS RECESS STRIPPED.
- ⑤ FOR EACH PART E5-9-715-UU1-13 AND E5-9-702-UU1, THERE WAS NO WATER INTRUSION DURING NEMA 4 TESTING.