

**southco**<sup>®</sup>

PROPRIETARY ITEM - EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY SOUTHCO, INC.

E5 TROLLER LATCH ASSEMBLY


DATE	DRAWN	CHKD	SCALE	DRAWING NUMBER
19AUG2008	MJS	AR	1:1	TD-E5-5-J

REV	DATE	DRAWN/CHKD	DESCRIPTION




THIRD ANGLE PROJECTION A4 PAPER SIZE

SOUTHCO PERFORMANCE GUIDELINES  
 THE PERFORMANCE GUIDELINES SHOWN ON THIS PAGE ARE SUPPLIED AS A GENERAL GUIDE ONLY, AS CONDITIONS VARY WITH EACH APPLICATION AND METHOD OF INSTALLATION. STRENGTH DATA GIVEN IS FOR FAILURE OF THE PRODUCT OR FOR SUFFICIENT DEFORMATION TO MAKE PRODUCT INOPERABLE. NO SAFETY FACTOR HAS BEEN APPLIED. IT IS RECOMMENDED THAT THE USER REQUEST A PRODUCT SAMPLE FOR TESTING TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE PURPOSE INTENDED AND USER'S PARTICULAR APPLICATION.

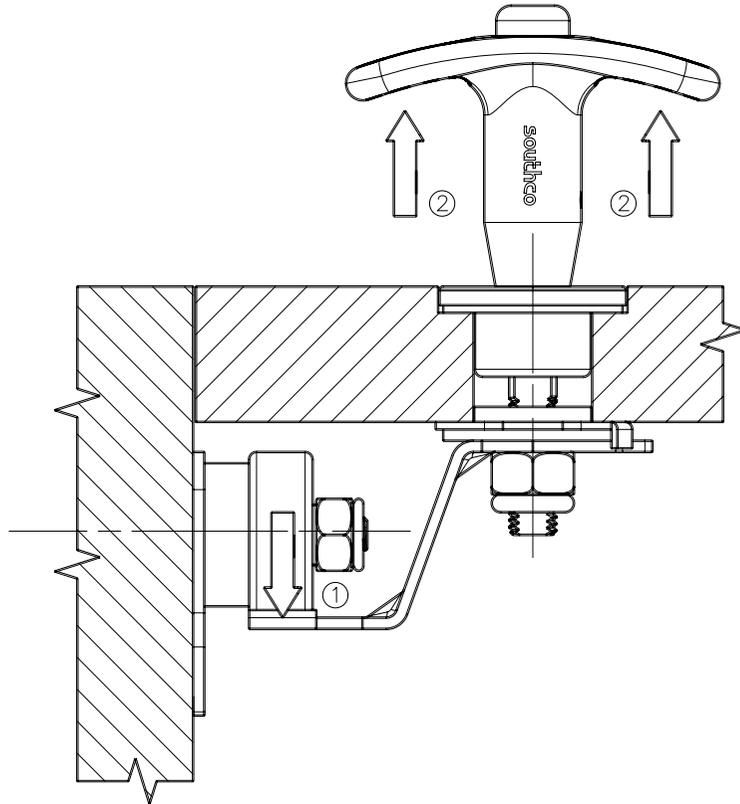

TEST DESCRIPTION	E5-70-1627-701
① AVERAGE ULTIMATE LOAD (PAWL)	200 N (45 lbf)
② AVERAGE ULTIMATE PULL OUT FORCE (T-HANDLE)	3300 N (742 lbf)
CYCLE TESTING	5000 CYCLES

Average ULTIMATE FORCE causes failure of the product or sufficient deformation to make the product inoperable.

Overloading the fastener beyond these conditions is not recommended.