


REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
C	24OCT2016	CJ/JQ	PRN: P2016-2430

SOUTHCO PERFORMANCE GUIDELINES

THE PERFORMANCE GUIDELINES SHOWN ON THIS PAGE ARE SUPPLIED AS A GENERAL GUIDE ONLY, AS CONDITIONS VARY WITH EACH APPLICATION AND METHOD OF INSTALLATION. STRENGTH DATA GIVEN IS FOR FAILURE OF THE PRODUCT OR FOR SUFFICIENT DEFORMATION TO MAKE PRODUCT INOPERABLE. NO SAFETY FACTOR HAS BEEN APPLIED IT IS RECOMMENED THAT THE USER REQUEST A PRODUCT SAMPLE FOR TESTING TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE PURPOSE INTENEDED AND USER'S PARTICULAR APPLICATION.

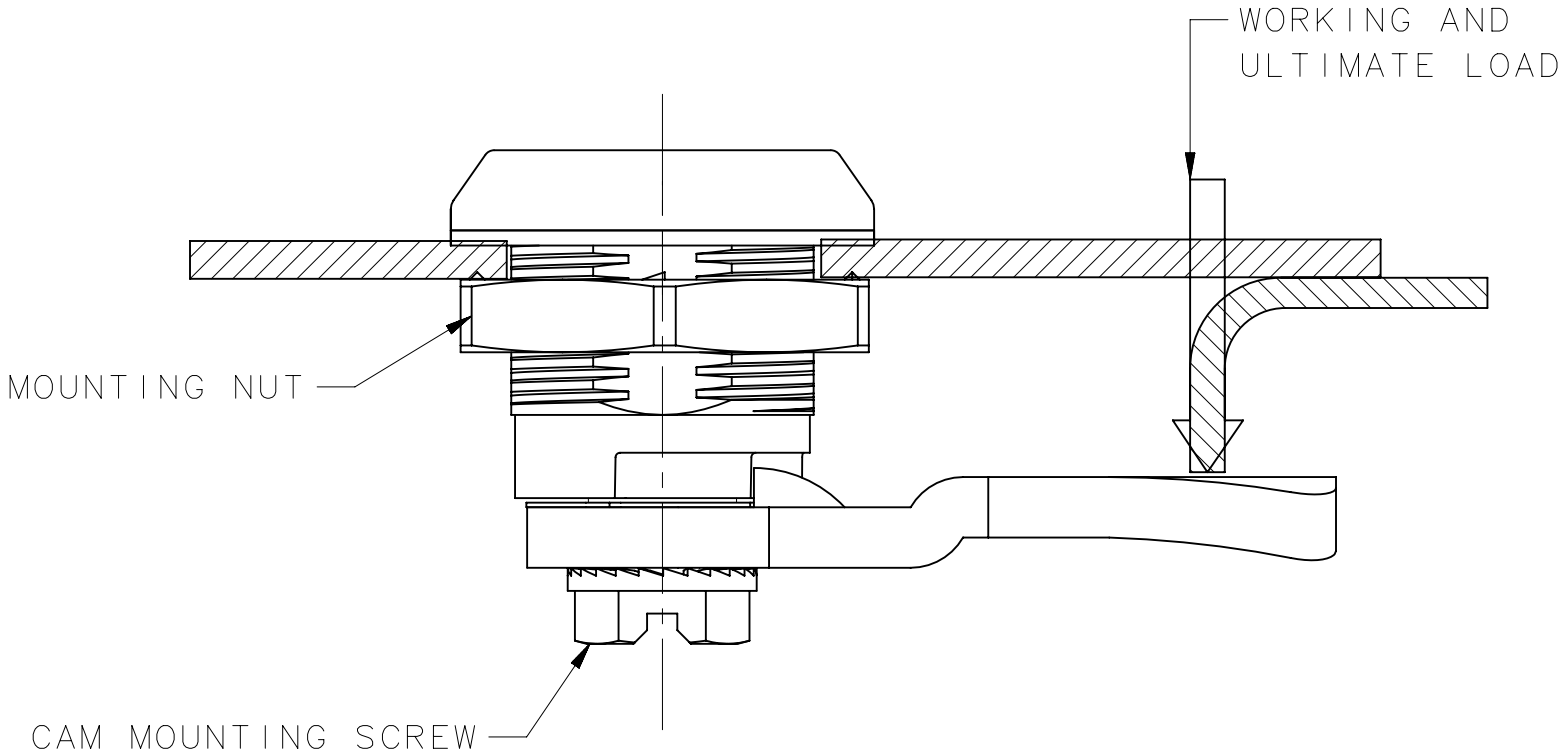

TEST DESCRIPTION	E5-8-WWX-UU1
MAXIMUM STATIC LOAD	330N
AVERAGE ULTIMATE LOAD	450N
MOUNTING NUT TIGHTENING TORQUE	10 N.m
MAXIMUM RECOMMENDED CAM SCREW TIGHTENING TORQUE	5 N.m
CYCLE LIFE	10000 AT 67N

MAXIMUM STATIC LOAD IS THE MAXIMUM RECOMMENDED LOAD AFTER ONE TIME APPLICATION AND REMOVAL OF WHICH THE PRODUCT CONTINUES TO FUNCTION PROPERLY.

REF trE5-24008 , trE5-24058

THIRD ANGLE PROJECTION	MILLIMETERS [IN]		TOLERANCES UNLESS OTHERWISE NOTED		DESCRIPTION	
SURFACE AREA		mm ²	ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.		E5 SLIDE LATCH	
VOLUME		mm ³				
PROPRIETARY ITEM		PER ASME Y14.5M-1994		SIZE	SYSTEM	DWG NO.
EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.		A3		NX		TD-E5-8-J
		DRAWN BY		DATE	SCALE	SHEET
		CJ/JQ		27APR2016	2:1	1 OF 1