
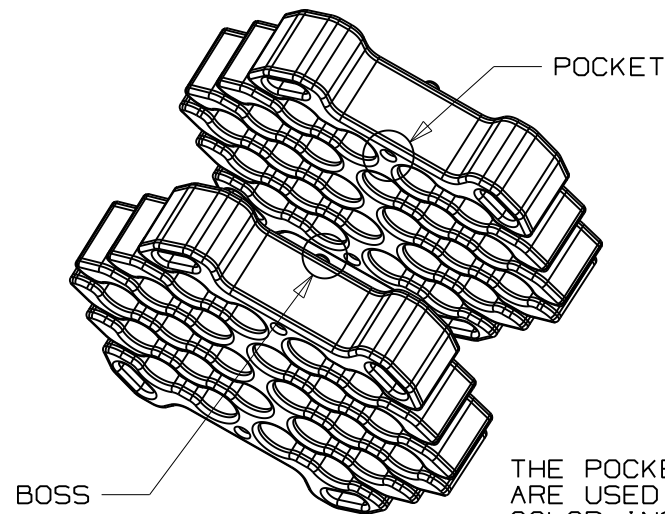


PART NO.	COMPONENT	RECOMMENDED FOR CABLE OUTER DIAMETER RANGE	USE THE FOLLOWING INSERT	INSERT USED WITH THE FOLLOWING PANDUIT CABLE TYPES	COMPONENT WEIGHT LBS. - (g)	No. OF CABLES	A in. (mm)	B in. (mm)	C in. (mm)
CBOT24K	JACKET	N/A	N/A	N/A	.031 (14)	N/A	3.40 (86.4)	1.12 (28.4)	2.86 (72.6)
	GREEN INSERT	.180"-.248" (4.57mm-6.30mm)	FLOURESCENT GREEN	TX5500 CATEGORY 5e UTP TX6000 CATEGORY 6 UTP	.048 (22)	24			
	YELLOW INSERT	.230"-.310" (5.84mm-7.87mm)	FLOURESCENT YELLOW	TX6500 ENHANCED CATEGORY 6 TX6A 10 Gig CATEGORY 6A** ALL SHIELDED CABLES	.046 (21)	24			
	UCT3S-P2-0	N/A	N/A	N/A	.006 (3)	N/A			

**WHEN USING THE CBOT24K ON 10Gig CABLES, IT IS RECOMMENDED THAT PANDUIT 10Gig CAT 6A CABLES BE USED FOR OPTIMUM PERFORMANCE OF INSTALLED CABLE.

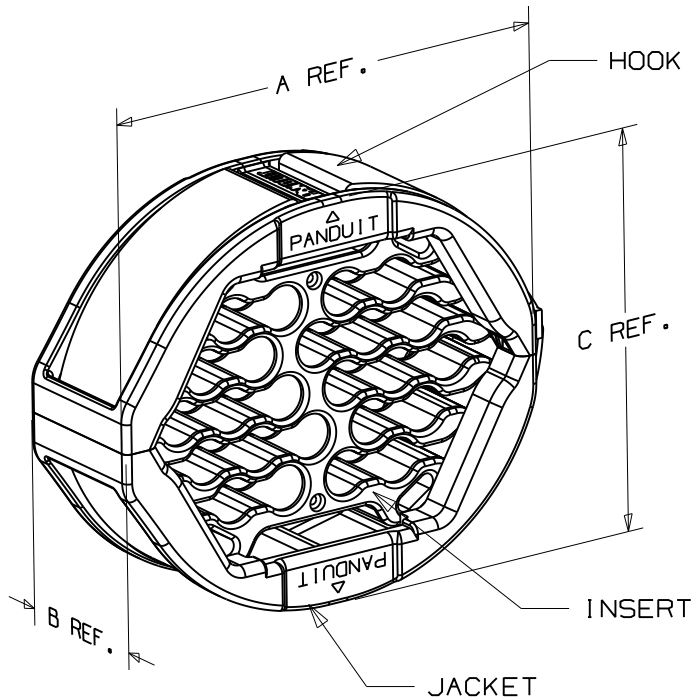

THE POCKET AND BOSS FEATURES ARE USED TO ALIGN TWO SAME COLOR INSERTS

CAD FILENAME/LAYERS

W10001CH/00

PANDUIT CORP. TINLEY PARK, ILLINOIS

CBOT24K
CABLE BUNDLE ORGANIZING TOOL

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
RAMA

MAT'L:

SCALE

3/4

DATE
1/25/07

NYLON 6/6

DRAWING NO.

SS-27576

DWG
A
SIZE

R 1/25/08 RAMA DRAWING RELEASED

R

REV DATE BY CHK DESCRIPTION

ECN - R CUST SUP

CHK'D