




Ty-Fast®

NOTES

1. MATERIAL: NYLON 6,6
2. IEC 62275 TYPE 2 CLASSIFICATION
3. OPERATING TEMPERATURE: -40°C TO 85°C
(-40°F TO 185°F)
4. MINIMUM INSTALLATION TEMPERATURE: -20°C
(-4°F)
5. ADD "-100" SUFFIX TO DENOTE PACK
QTY OF 100 TIES
6. ALL TIES UL62275 TYPE 2 IS
(EXCEPT TY125-40-9
& TY100-18-9, TYPE 2)

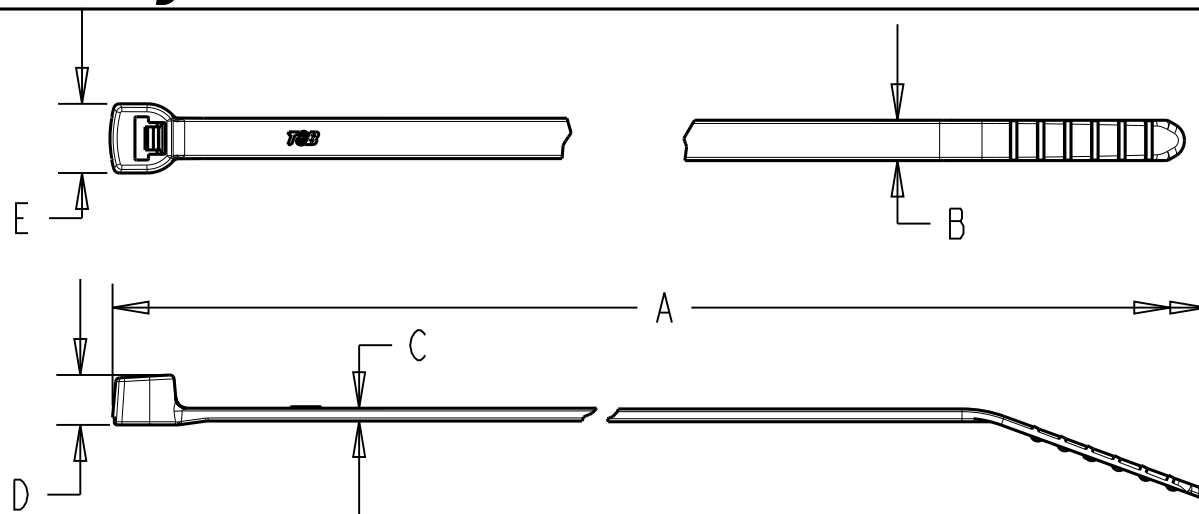

CATALOG NUMBER	A IN [mm]	B IN [mm]	C IN [mm]	D IN [mm]	E IN [mm]	TENSILE STRENGTH LBF [N]	MIN BUNDLE DIAMETER IN [mm]	MAX BUNDLE DIAMETER IN [mm]	MIL-SPEC NUMBER
TY175-50-9	7.34 [186]	.184 [4.67]	.046 [1.17]	.220 [5.59]	.310 [7.87]	50 [222]	.125 [3.18]	1.75 [44.5]	MS3367-1-9
TY400-50-9	14.4 [365]	.184 [4.67]	.049 [1.24]	.220 [5.59]	.310 [7.87]	50 [222]	.125 [3.18]	4.00 [102]	MS3667-2-9
TY400-120-9	14.75 [374]	.299 [7.59]	.075 [1.91]	.310 [7.87]	.480 [12.19]	120 [534]	.590 [15]	4.00 [102]	MS3667-3-9
TY100-18-9	4.4 [111]	.095 [2.41]	.044 [1.12]	.155 [3.94]	.190 [4.83]	18 [80]	.059 [1.5]	1.00 [25.4]	MS3667-4-9
TY125-40-9	5.57 [141]	.140 [3.56]	.046 [1.17]	.175 [4.45]	.240 [6.10]	40 [178]	.059 [1.5]	1.25 [31.8]	MS3667-5-9
TY300-50-9	11.90 [302]	.184 [4.67]	.049 [1.24]	.220 [5.59]	.310 [7.87]	50 [222]	.125 [3.17]	3.00 [76.2]	MS3667-7-9

REVISIONS		GENERAL NOTES		DESCRIPTION:			ABB	
0	SEE ERN (****) FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: ****	1. ALL DIMENSIONS ARE FOR REFERENCE ONLY. 2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.	TY-FAST MIL-SPEC CABLE TIES - NATURAL					
			ORIGINAL PROJECT NO / (ERN NO) FM40183/(ERN NO:2018021)	SHEET NO: 1 OF 1	REV. NO: 0	DRAWING NO: WSD-001837		

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY. AND THE RIGHT IS RESERVED TO DEViate FROM ANY OF THE DETAILS SHOWN HEREON.
COPYRIGHT ABB GROUP. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL.