
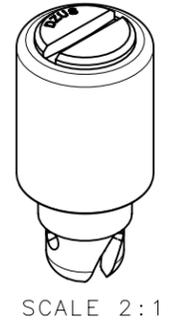
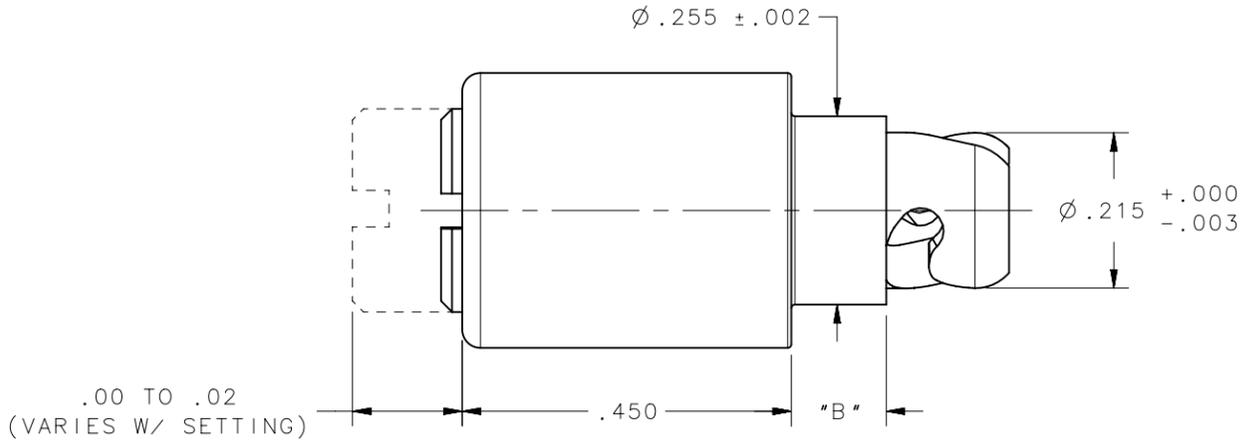
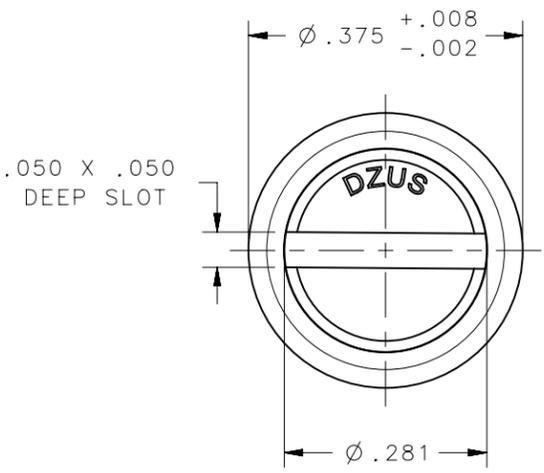


REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
B	13NOV2018	CMS/JW	PRN: P2018-2593

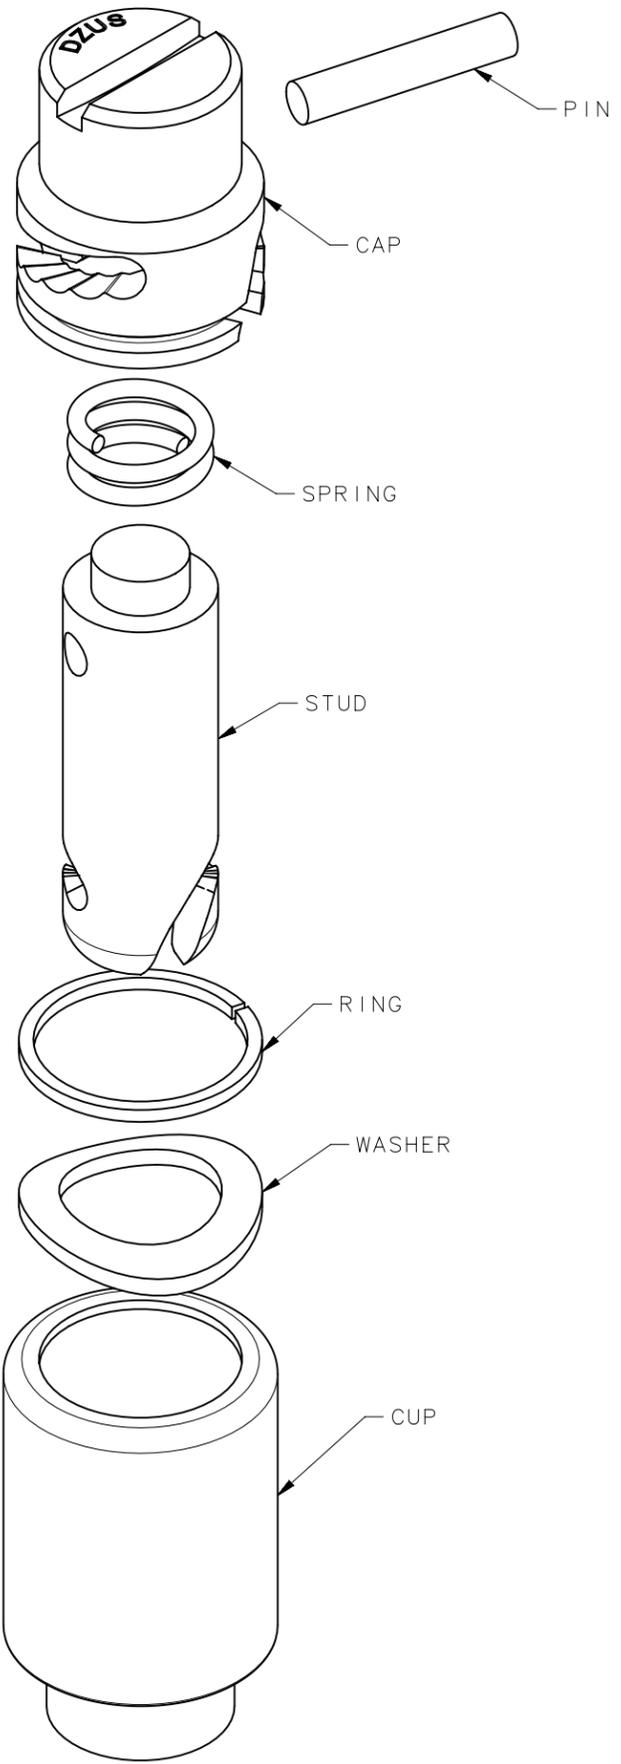

DFCI PART NUMBER	SOUTHCO PART NUMBER	MATERIAL	FINISH	OTHER	DIM *B*	PANEL THICKNESS RANGE
3522-S38-C3C	D5-PVS35-38CBCNA	SEE NOTE A	SEE NOTE B	-	0.080	.060 - .069
3522-S38D-EEBT	D5-PVS35-38DEBTNA	SEE NOTE A	SEE NOTE B	DEBURRED	0.080	.060 - .069
3522-S38D-EEGT	D5-PVS35-38DEGTNA	SEE NOTE A	SEE NOTE B	DEBURRED	0.080	.060 - .069
3522-S38-Z3B	D5-PVS35-38ZBBNA	SEE NOTE A	SEE NOTE B	-	0.080	.060 - .069
3522-S38-Z3BT	D5-PVS35-38ZBTNA	SEE NOTE A	SEE NOTE B	-	0.080	.060 - .069
3522-S38-Z3CT	D5-PVS35-38ZCTNA	SEE NOTE A	SEE NOTE B	-	0.080	.060 - .069
3522-S39-Z3CT	D5-PVS35-39ZCTNA	SEE NOTE A	SEE NOTE B	-	0.090	.070 - .079
3522-S41-Z3B	D5-PVS35-41ZBBNA	SEE NOTE A	SEE NOTE B	-	0.110	.090 - .099
3522-S42-C3C	D5-PVS35-42CBCNA	SEE NOTE A	SEE NOTE B	-	0.120	.100 - .109
3522-S43-Z3CT	D5-PVS35-43ZCTNA	SEE NOTE A	SEE NOTE B	-	0.130	.110 - .119
3522-S44-EEB	D5-PVS35-44SEBNA	SEE NOTE A	SEE NOTE B	-	0.140	.120 - .129
3522-S44-Z3B	D5-PVS35-44ZBBNA	SEE NOTE A	SEE NOTE B	-	0.140	.120 - .129
3522-S44-Z3CT	D5-PVS35-44ZCTNA	SEE NOTE A	SEE NOTE B	-	0.140	.120 - .129

WASHER	1095 STEEL, SPRING TEMPER
RING	HARD DRAWN PER ASTM-A227-93
PIN	316 STAINLESS STEEL
SPRING	17-7 PH STEEL, SPRING TEMPER
STUD	8620 STEEL, HEAT TREAT ROCKWELL C30-38
CUP	1008/1010, 1215, 8620 STEEL
CAP	8620 STEEL, CASE HARDEN
DESCRIPTION	MATERIAL

THIRD ANGLE PROJECTION			
CAGE CODE 72794			
INCHES [MM]		DESCRIPTION	
TOLERANCES UNLESS OTHERWISE NOTED		LINE RECEPTACLE	
X°	±2°	SIZE	B
X/X	±1/32	SYSTEM	NX
.XX	±0.015	DWG NO.	J-D5-PVS35NA
.XXX	±0.010	DATE	14JUL2015
MACHINE FINISH: .125		SCALE	4:1
PER ASME Y14.5M-1994		DRAWN BY	CMS/NJF
PROPRIETARY ITEM		DATE	14JUL2015
EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.		SHEET	1 OF 1